

CATEGORY: RUBBER FLOOR MOUNTS



RMD SERIES

EPDM rubber floor mount

33–2,200 lb

Rated load (15–1,000 kg)

0.32–0.47 in


Deflection (8–12 mm)

16 models

4 sizes, color-coded

DESCRIPTION

- Designed for floor mounting.
- Ribbed, non-skid base grips the surface; bolting down is recommended for best results.
- Steel-reinforced rubber for added strength.
- Threaded insert on top for fastening.
- Material: EPDM.
- RMD3 and RMD4 have a rectangular base.

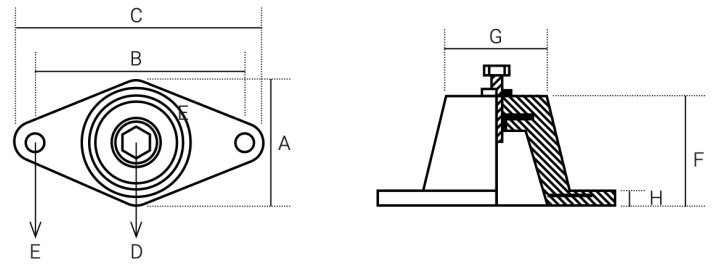

Dimensions A to H in millimetres (see table).

APPLICATION

Used for a wide range of HVAC equipment such as compressors, air handling units, fans, pumps and chillers.

SELECTION TABLE

Model	Rated load (lb)	Rated load (kg)	Deflection (in)	Color	A	B	C	D	E	F	G	H
RMD1 33	33	15	0.32	● blue	45	50	80	6	8.5	32	35	5
RMD1 44	44	20	0.32	● red	45	50	80	6	8.5	32	35	5
RMD1 66	66	30	0.32	● green	45	50	80	6	8.5	32	35	5
RMD1 110	110	50	0.32	● black	45	50	80	6	8.5	32	35	5
RMD2 130	130	60	0.40	● blue	60	76	98	10	8.5	45	45	5.5
RMD2 165	165	75	0.40	● red	60	76	98	10	8.5	45	45	5.5
RMD2 220	220	100	0.40	● green	60	76	98	10	8.5	45	45	5.5
RMD2 385	385	175	0.40	● black	60	76	98	10	8.5	45	45	5.5
RMD3 200	200	90	0.47	● blue	60	80	102	10	12	50	45	6.5
RMD3 275	275	125	0.47	● red	60	80	102	10	12	50	45	6.5
RMD3 385	385	175	0.47	● green	60	80	102	10	12	50	45	6.5
RMD3 500	500	225	0.47	● black	60	80	102	10	12	50	45	6.5
RMD4 770	770	350	0.47	● blue	92	120	150	12	14	90	70	10
RMD4 990	990	450	0.47	● red	92	120	150	12	14	90	70	10
RMD4 1320	1,320	600	0.47	● green	92	120	150	12	14	90	70	10
RMD4 2200	2,200	1,000	0.47	● black	92	120	150	12	14	90	70	10

Note: Research and development is an ongoing process. As improvements are made, specifications and dimensions may change without notice. Dimensional tolerances conform to international standards.