

CATEGORY: ANTI-VIBRATION PADS



RSR-H SERIES

Rubber-steel-rubber pad with center hole

60 psi

Maximum load (414 kPa)

0.21 in

Deflection at max. load (5.3 mm)

5/8 in

Center hole (16 mm)

DESCRIPTION


- Multi-layer ribbed rubber pads separated by a steel plate for uniform load distribution.
- Recommended where vibration and noise control are required.
- No bolting required. Simple field installation.
- 5/8" center hole for bolting when required.

APPLICATION

Used for pumps, motors, air-conditioning units, generators, fans, chillers and cooling towers.

SELECTION TABLE

Model	Size (in)	Thickness (in)	Hole (in)	Rated load (lb)	(kg)
RSR-H	4 x 4	7/8	5/8	800	363

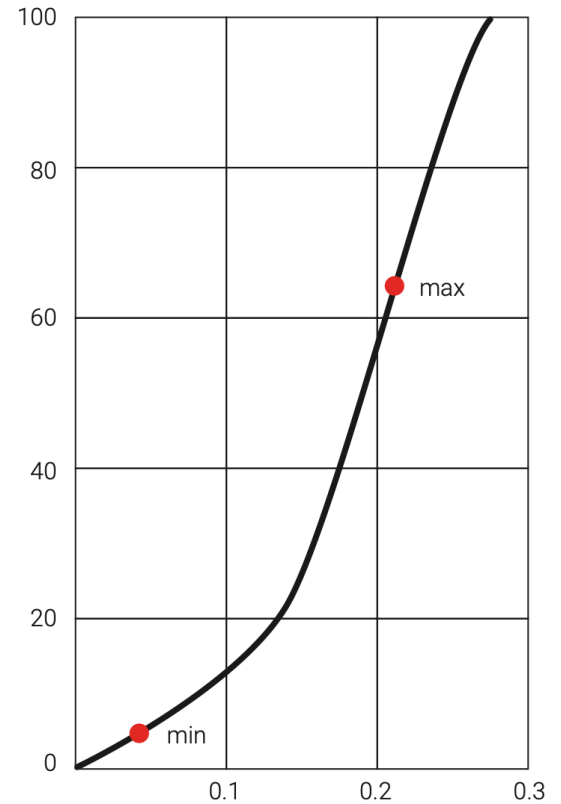

Load (psi) versus deflection (in). Maximum load: 60 psi at 0.21 in.