

CATEGORY: RUBBER HANGERS



EHD SERIES

Neoprene hanger, double deflection

33–370 lb

Max. load (15–168 kg)

0.4–0.5 in

Deflection (10–13 mm)

8 models

Color-coded elements

DESCRIPTION

- Neoprene elements housed in heavy-duty steel brackets.
- Designed to prevent metal-to-metal contact.
- Double-deflection neoprene element.
- Accepts 3/8" (EHD1) or 1/2" (EHD2) hanger rods, supplied by others.


APPLICATION

Used for suspended HVAC equipment.

SELECTION TABLE

Model	Max. load (lb)	Max. load (kg)	Defl. (in)	A	B	C	D	Rod
EHD1 blue	33	15	0.4	3	1 3/8	2	2 1/4	3/8
EHD1 red	44	20	0.4	3	1 3/8	2	2 1/4	3/8
EHD1 green	66	30	0.4	3	1 3/8	2	2 1/4	3/8
EHD1 black	110	50	0.4	3	1 3/8	2	2 1/4	3/8
EHD2 blue	130	59	0.5	4 1/2	1 7/8	2 1/4	3	1/2
EHD2 red	160	73	0.5	4 1/2	1 7/8	2 1/4	3	1/2
EHD2 green	230	104	0.5	4 1/2	1 7/8	2 1/4	3	1/2
EHD2 black	370	168	0.5	4 1/2	1 7/8	2 1/4	3	1/2

Dimensions A to D and rod diameter in inches.

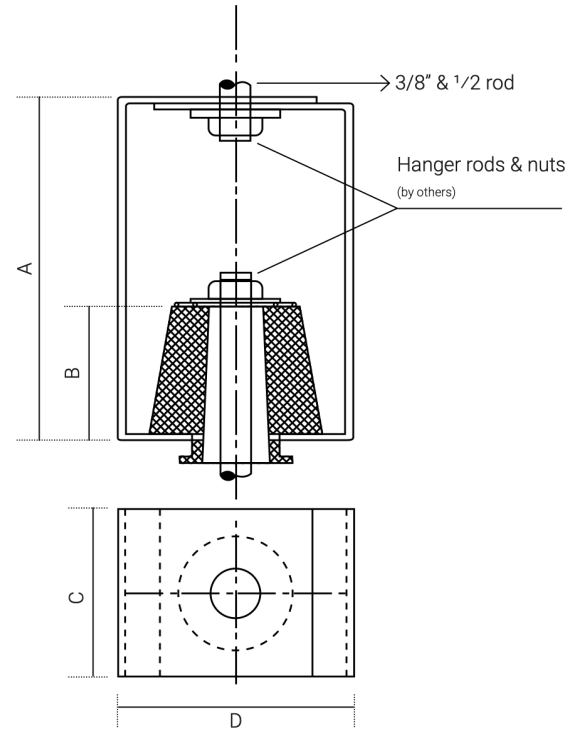

Hanger rods and nuts supplied by others.