


Distributed by DEFLECTION.ca

– 514-371-6669 | Mickael@deflection.ca

Specification sheet manufactured by VIBRACAN

Damping Pads

– SERIES RP

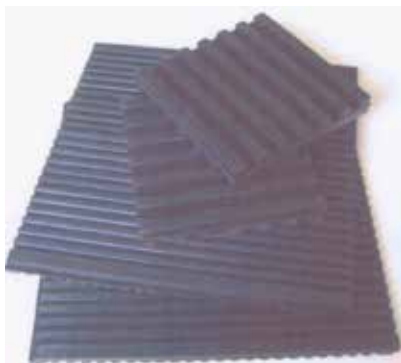

MODEL:	RP
PRODUCT NAME:	RIBBED PADS
THICKNESS:	3/8 INCHES

DESCRIPTION

Design allows for easy cutting.
Simple field installation.
Ribbed pattern.
Working range for RP ranging from 15 to 55 PSI.

APPLICATION

Where bolting is to be avoided.
Minor, non critical vibration conditions.
Used for pumps, motors, AC unites, generators, etc.
Recommended for acoustic problem applications.

Note

Research and development is a continuous process with us as improvements are made from time to time, specifications/ dimensions may change without notice. Tolerances in dimensions are as per international standards.

DISTRIBUTED BY:

DEFLECTION