





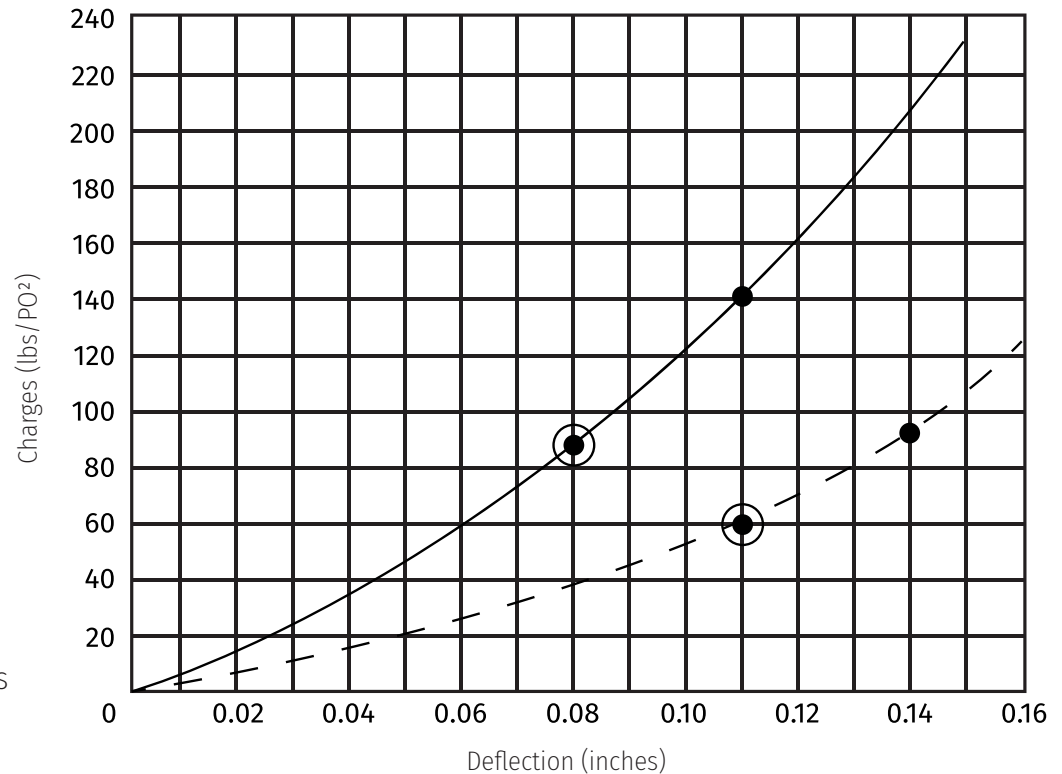
## N / SN / NSN




### Legend :

-  Optimal load
-  Maximum load
-  50 durometer
-  30 durometer

### NOTE

Chart based on 4x4x9/16in pads



model	elastomerique (inches)	acier (inches)	produit
N	9/16 (code 2)	-	
SN	9/16	1/8	
NSN	9/16	1/8	

dimensions (inches)	50 durometer		30 durometer	
	charges optimales (lbs)	charges max.	charges optimales (lbs)	charges max.
2.25 x 2.25	450	710	380	450
4.50 x 4.50	1800	2800	1200	1800
6.00 x 6.00	3200	5000	2160	3200
8.25 x 8.25	6100	9500	4080	6100
18.00 x 18.00	29 000	45 400	19 400	29 000

Note  
Research and development is a continuous process with us as improvements are made from time to time, specifications/ dimensions may change without notice. Tolerances in dimensions are as per international standards.