

CATEGORY : DAMPING PADS




## SERIES RP

### DESCRIPTION

- Design allows for easy cutting.
- Simple field installation.
- Ribbed pattern.
- Working range for RP ranging from 15 to 55 PSI.

### APPLICATION

- Where bolting is to be avoided.
- Minor, non critical vibration conditions.
- Used for HVAC, motors, pumps, generators, air conditioning units, chillers, machine shop machines, etc.
- Recommended for acoustic problem applications.

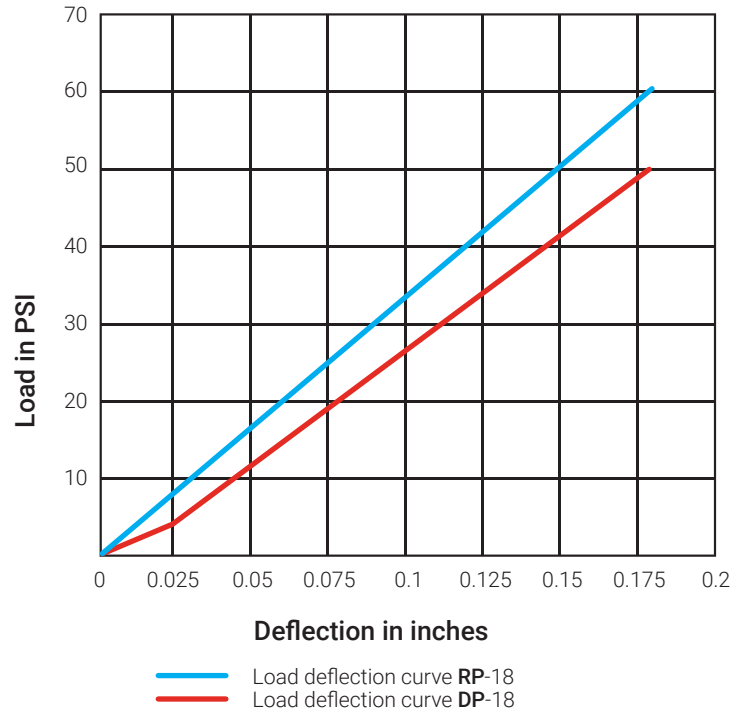

model no.	load range (psi)	Dimensions		
		Length (in)	Width (in)	Thickness (in)
RP2	15 - 55	2	2	3/8
RP3	15 - 55	3	3	3/8
RP4	15 - 55	4	4	3/8
RP6	15 - 55	6	6	3/8
RP8	15 - 55	8	8	3/8
RP12	15 - 55	12	12	3/8
RP18	15 - 55	18	18	3/8

**NOTE :** Research and development is a continuous process with us as improvements are made from time to time, specifications/ dimensions may change without notice. Tolerances in dimensions are as per international standards.