


CATEGORY : DAMPING PADS

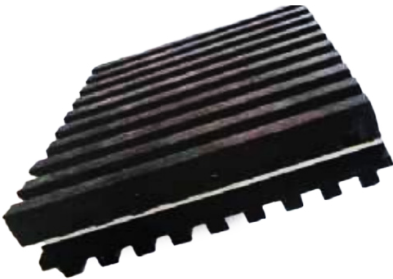

SERIES RSR

DESCRIPTION


- Maximum load: 60 lbs/square inch, Deflection: 0.21 inch
- No bolting required.
- Multi-layers ribbed rubber pads separated by steel plate for uniform load distribution.
- Multi-layers are recommended where vibration and noise control is required.

APPLICATION

Used for pumps, motors, air-conditioning units, generators, fans, chillers and cooling towers.

model	product name	thickness (in)
RSR	Rubber steel rubber	$\frac{7}{8}$

size (in)	rated load
2 x 2	200
2 x 4	400
3 x 3	450
4 x 4	800
6 x 6	1800

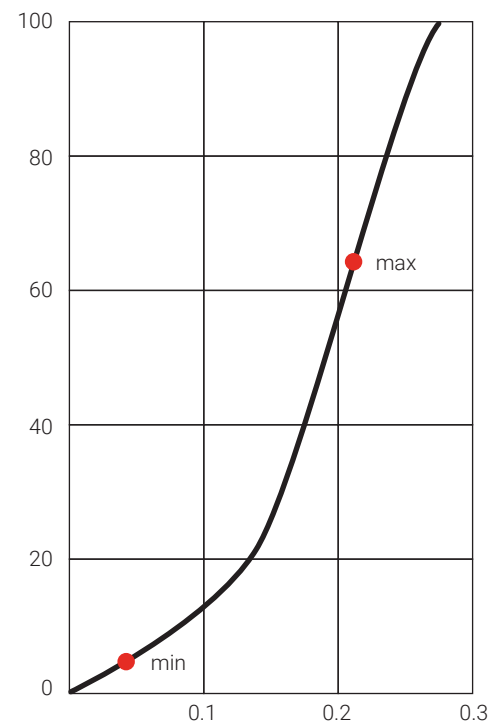

NOTE : Research and development is a continuous process with us as improvements are made from time to time, specifications/ dimensions may change without notice. Tolerances in dimensions are as per international standards.