
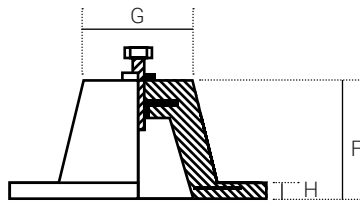


CATEGORY : DAMPING PADS

## SERIES RMD



### DESCRIPTION

- Suitable for mounting on floor.
- Ribbed/ Non skid design used for providing grip with the surface. But it is recommended to fasten the product for better results.
- Steel re-enforced rubber for better strength.
- Threading provided at top for fastening.
- Material: EDPM neoprene
- RMD3 & RMD4 are rectangle base type.

### APPLICATION

Used for wide range of HVAC equipments such as compressors, air handling units, fans, pumps and chillers, etc.

| model no. | rated load<br>(lbs) | rated load<br>(kgs) | deflection<br>(in) | colour code<br>of spring | dimensions in MM |     |     |    |     |    |    |     |
|-----------|---------------------|---------------------|--------------------|--------------------------|------------------|-----|-----|----|-----|----|----|-----|
|           |                     |                     |                    |                          | A                | B   | C   | D  | E   | F  | G  | H   |
| RMD1 33   | 33                  | 15                  | 0.32               | blue                     | 45               | 60  | 80  | 6  | 8.5 | 32 | 35 | 5   |
| RMD1 44   | 44                  | 20                  | 0.32               | red                      | 45               | 60  | 80  | 6  | 8.5 | 32 | 35 | 5   |
| RMD1 66   | 66                  | 30                  | 0.32               | green                    | 45               | 60  | 80  | 6  | 8.5 | 32 | 35 | 5   |
| RMD1 110  | 110                 | 50                  | 0.32               | black                    | 45               | 60  | 80  | 6  | 8.5 | 32 | 35 | 5   |
| RMD2 130  | 130                 | 60                  | 0.40               | blue                     | 60               | 76  | 98  | 10 | 8.5 | 45 | 45 | 5.5 |
| RMD2 165  | 160                 | 75                  | 0.40               | red                      | 60               | 76  | 98  | 10 | 8.5 | 45 | 45 | 5.5 |
| RMD2 220  | 230                 | 100                 | 0.40               | green                    | 60               | 76  | 98  | 10 | 8.5 | 45 | 45 | 5.5 |
| RMD2 385  | 370                 | 175                 | 0.40               | black                    | 60               | 76  | 98  | 10 | 8.5 | 45 | 45 | 5.5 |
| RMD3 200  | 200                 | 90                  | 0.47               | blue                     | 60               | 80  | 102 | 10 | 12  | 50 | 45 | 6.5 |
| RMD3 275  | 275                 | 125                 | 0.47               | red                      | 60               | 80  | 102 | 10 | 12  | 50 | 45 | 6.5 |
| RMD3 385  | 385                 | 175                 | 0.47               | green                    | 60               | 80  | 102 | 10 | 12  | 50 | 45 | 6.5 |
| RMD3 500  | 500                 | 225                 | 0.47               | black                    | 60               | 80  | 102 | 10 | 12  | 50 | 45 | 6.5 |
| RMD4 770  | 770                 | 350                 | 0.47               | blue                     | 92               | 120 | 150 | 12 | 14  | 90 | 70 | 10  |
| RMD4 990  | 990                 | 450                 | 0.47               | red                      | 92               | 120 | 150 | 12 | 14  | 90 | 70 | 10  |
| RMD4 1320 | 1320                | 600                 | 0.47               | green                    | 92               | 120 | 150 | 12 | 14  | 90 | 70 | 10  |
| RMD4 2200 | 2200                | 1000                | 0.47               | black                    | 92               | 120 | 150 | 12 | 14  | 90 | 70 | 10  |

**NOTE :** Research and development is a continuous process with us as improvements are made from time to time, specifications/ dimensions may change without notice. Tolerances in dimensions are as per international standards.