


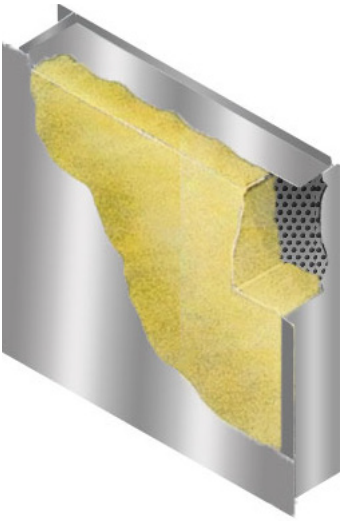

ACOUSTIC PANEL

Characteristics

External wall type	Galvanized steel
External wall material	Galvanized steel
External wall thickness	18 gauge
External wall type	Perforated metal
Internal betting material	22 gauge
Acoustic media	Rock wool
Media density	2.8 lbs/3ft
Protective film	None
Internal reinforcements	16 gauge 'C' reinforcements
Reinforcement spacing	18"

Dimensions

Thickness available	2" ou 4"
Size	Selon spécifications

Yield

NRC	1.0
STC	43
Deflection	Zero under 10" of water

Acoustic performance

Central octave bands (Hz)	125	250	500	1K	2K	4K
Absorption coefficients	0.98	1.10	1.06	0.96	0.95	0.74
Transmission loss (TL)	24	32	44	55	57	64

NOTE : La recherche et le développement sont un processus continu chez nous car des améliorations sont apportées de temps en temps, les spécifications/dimensions peuvent changer sans préavis. Les tolérances dimensionnelles sont conformes aux normes internationales.